


Semi-High Tension Dead End for ADSS Cable

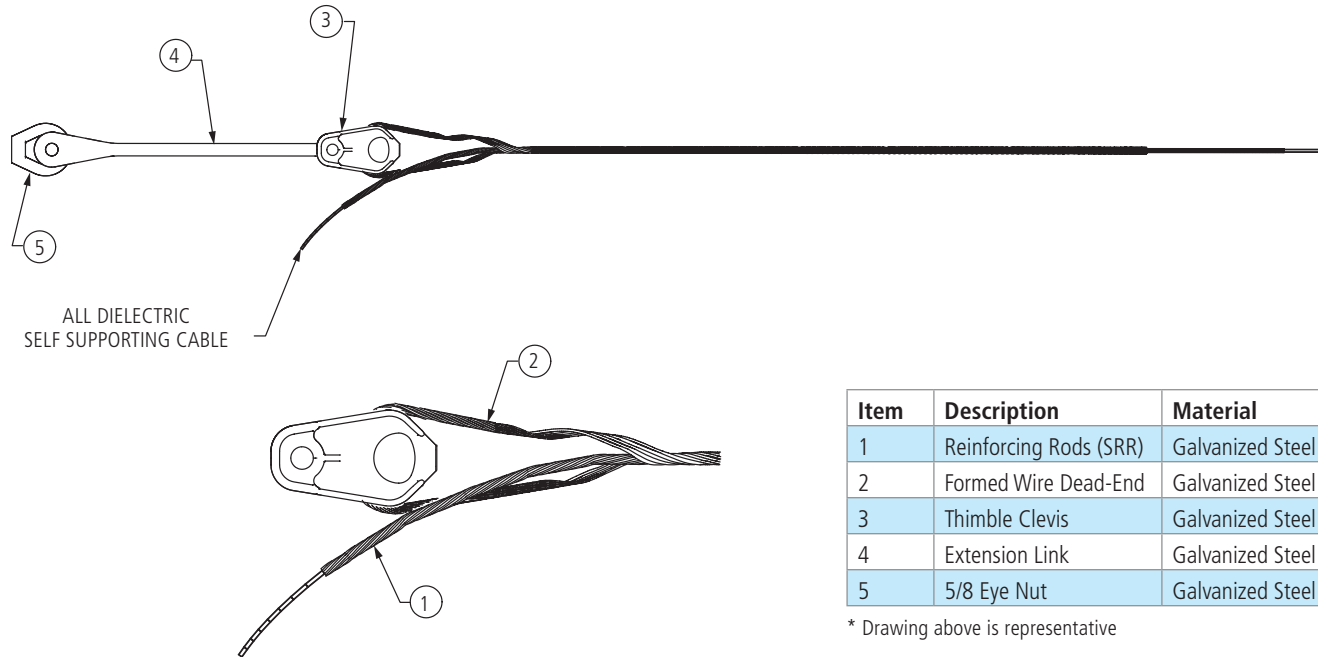

Item	Description	Material
1	Reinforcing Rods (SRR)	Galvanized Steel
2	Formed Wire Dead-End	Galvanized Steel
3	Thimble Clevis	Galvanized Steel
4	Extension Link	Galvanized Steel
5	5/8 Eye Nut	Galvanized Steel

* Drawing above is representative

Features

- Components strength—15,000 lbs.
- Maximum initial tension—up to 4,000 lbs.
- Maximum loaded tension—up to 7,500 lbs.
- Dead end component may be reused once during initial installation
- Contact AFL for Length Information and track-resistant ADSS application
- Lengths range from 100" to 134"

Ordering Information

AFL NO.	CABLE OD (in.)	LENGTH "L" (in.)	COLOR CODE
ADELE482/510C	.482-.510	98	Orange
ADELE511/542C	.511-.542	988	Blue
ADELE543/577C	.543-.577	1008	White
ADELE578/613C	.578-.613	104	Red
ADELE614/651C	.614-.651	106	Black
ADELE652/692C	.652-.692	106	Yellow
ADELE693/737C	.693-.737	108	Green
ADELE738/784C	.738-.784	113	Orange
ADELE785/834C	.785-.834	118	Blue
ADELE835/889C	.835-.889	119	White
ADELE890/945C	.890-.945	121	Red
ADELE946/1007C	.946-1.007	123	Black
ADELE1008/1073C	1.008-1.073	126	Purple
ADELE1074/1140C	1.074-1.140	127	Pink
ADELE1141/1212C	1.141-1.212	129	Brown
ADELE1213/1288C	1.213-1.288	133	Orange